

**FBHE Series**  
SMD Suppression Ferrite Bead  
Size 1206




**CHARACTERISTICS**

- 
- 
- 
- 
- 


**APPLICATION**

- 
- 

Dimensions: [mm]

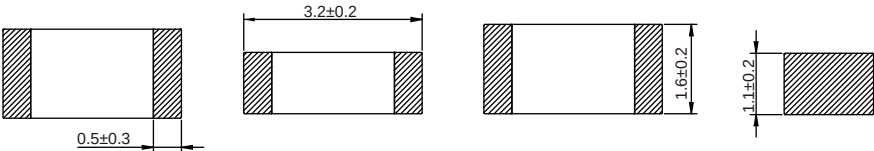

Land Pattern: [mm]



Electrical Properties:

| Part No           | Impedance<br>@100MHz<br>(Ω) | Tolerance | DCR<br>(max)<br>(Ω) | Temperature Rise<br>Current (max)<br>(mA) |
|-------------------|-----------------------------|-----------|---------------------|-------------------------------------------|
| FBHE1206-300-302R | 30                          |           | 0.04                | 3000                                      |
| FBHE1206-600-502R | 60                          |           | 0.02                | 5000                                      |
| FBHE1206-800-302R | 80                          |           | 0.04                | 3000                                      |
| FBHE1206-121-202R | 120                         |           | 0.10                | 2000                                      |
| FBHE1206-151-202R | 150                         |           | 0.10                | 2000                                      |
| FBHE1206-301-102R | 300                         |           | 0.20                | 1000                                      |
| FBHE1206-301-302R | 300                         |           | 0.04                | 3000                                      |
| FBHE1206-471-102R | 470                         |           | 0.20                | 1000                                      |
| FBHE1206-501-302R | 500                         |           | 0.04                | 3000                                      |
| FBHE1206-601-202R | 600                         |           | 0.10                | 2000                                      |
| FBHE1206-601-302R | 600                         |           | 0.10                | 3000                                      |

℃

℃

℃

## Impedance & Frequency Characteristics:

