



SMD Low Profile High Current Molded Inductor
Size 5030




.....

Dimensions: [mm]

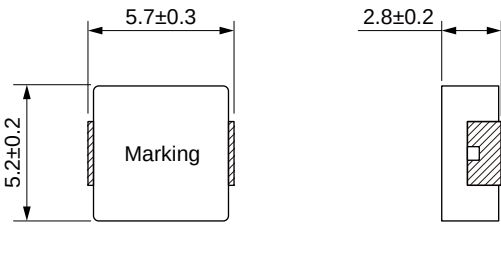

Land Pattern: [mm]



Electrical Properties:













Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Saturation current Typ. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)
					68	

°C

°C

°C

Typical Electrical Characteristics:

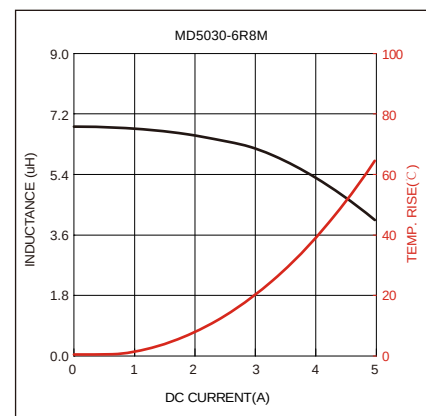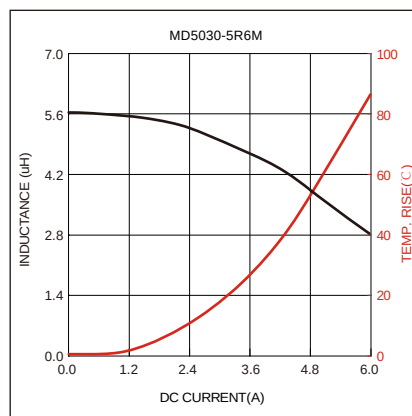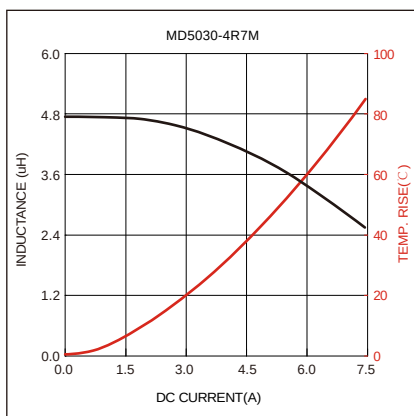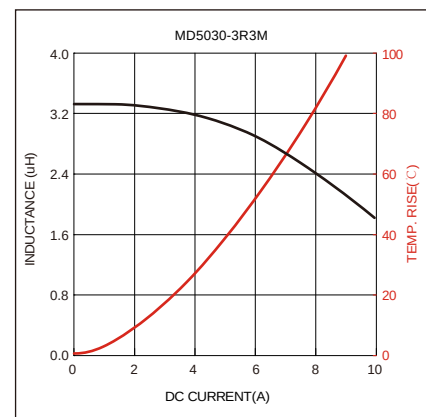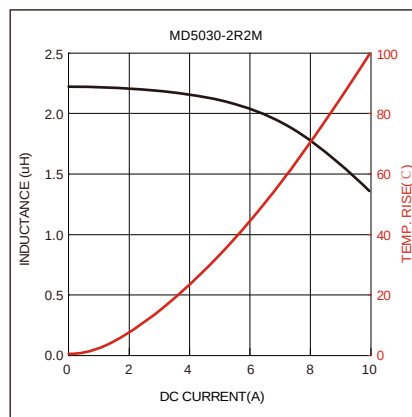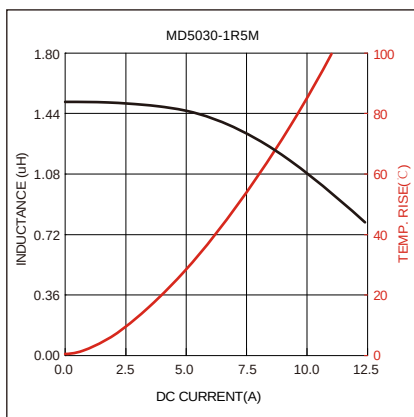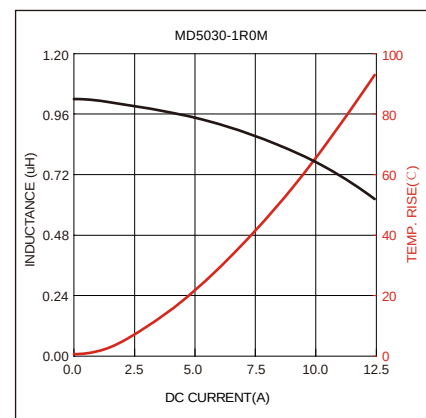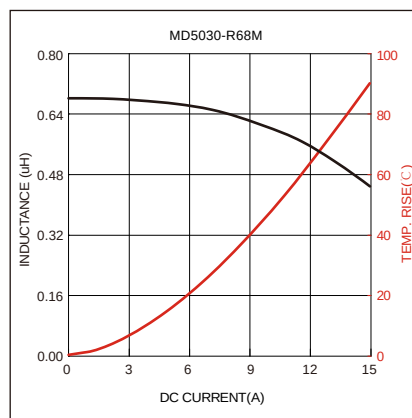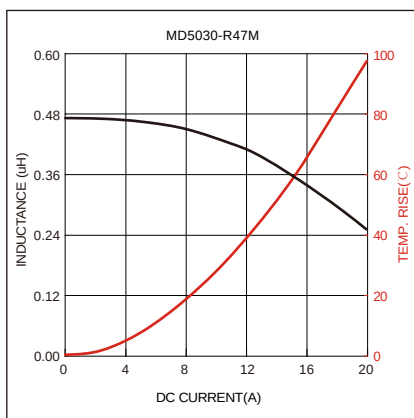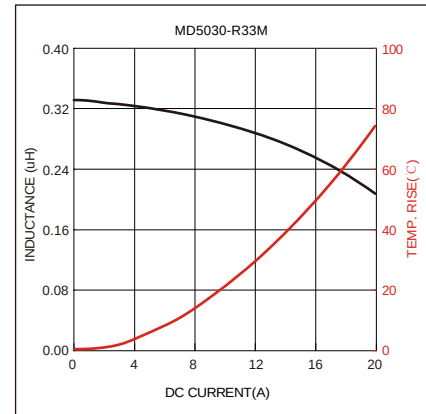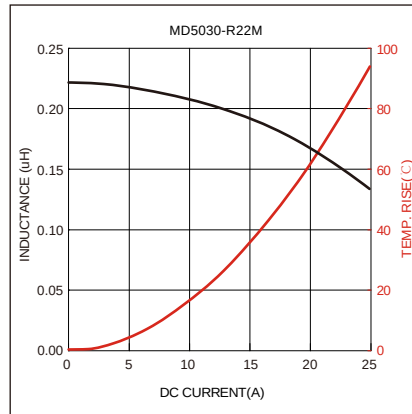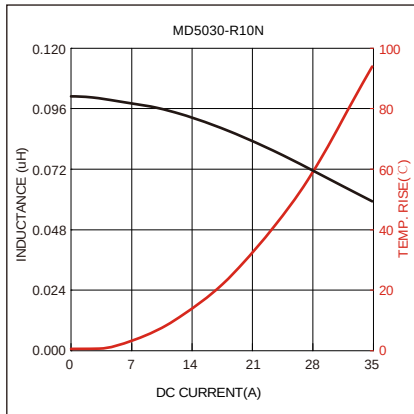

Typical Electrical Characteristics:

