


WI Series

CHARACTERISTICS

- Nizn material with a high Q at high frequency
- Different sizes and wide inductances available
- Quantity: 2000pcs


APPLICATION

- Low power DC/DC converter
- Filter
- General circuit application

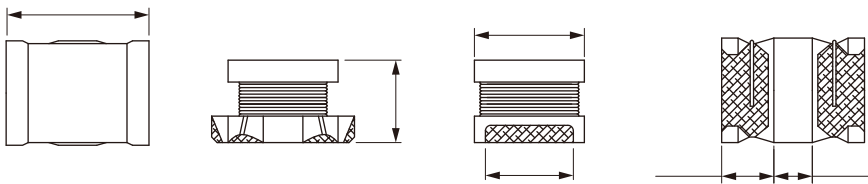


	(μH)			(Hz)		(MHz)	(Ω)	(mA) Δ °C	(mA) Δ °C
WI1210-390K	39	±10%	40	1M	1M	11	2.00	115	152
WI1210-470K	47	±10%	40	1M	1M	11	3.00	110	146
WI1210-680K	68	±10%	35	1M	1M	9	3.80	96	130
WI1210-820K	82	±10%	35	1M	1M	8.5	5.60	85	105
WI1210-101K	100	±10%	40	1M	796K	8	6.50	80	100
WI1210-121K	120	±10%	40	1M	796K	7.5	7.00	75	95
WI1210-151K	150	±10%	40	1M	796K	7	9.20	70	86
WI1210-181K	180	±10%	40	1M	796K	6	10.2	65	80
WI1210-221K	220	±10%	40	1M	796K	5.5	11.8	65	75
WI1210-271K	270	±10%	40	1M	796K	5	14.8	60	70
WI1210-331K	330	±10%	40	1M	796K	5	16.5	55	65
WI1210-391K	390	±10%	46	1M	796K	5	22.0	50	60
WI1210-471K	470	±10%	46	1K	796K	5	25.0	45	55
WI1210-561K	560	±10%	46	1K	796K	5	28.0	40	48

Operating temperature : -40 °C to +125 °C

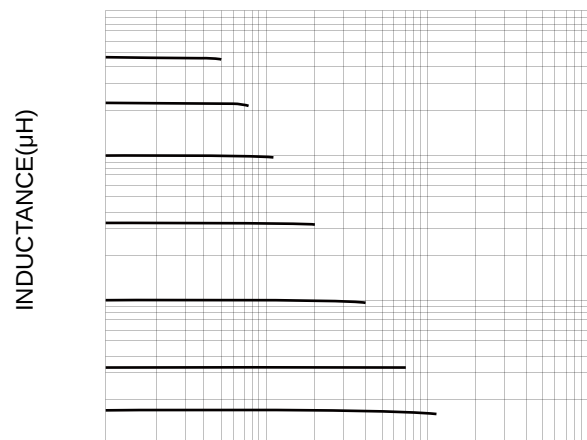

DC CURRENT(mA)

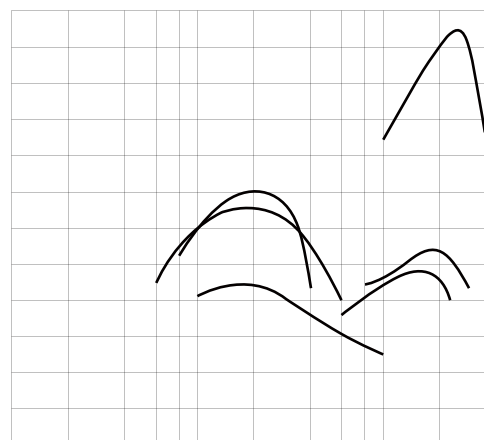

FREQUENCY(MHz)